


AT 215 4K PROFESSIONAL VIDEO BAR

With advanced ISP processing for professional remote meetings.

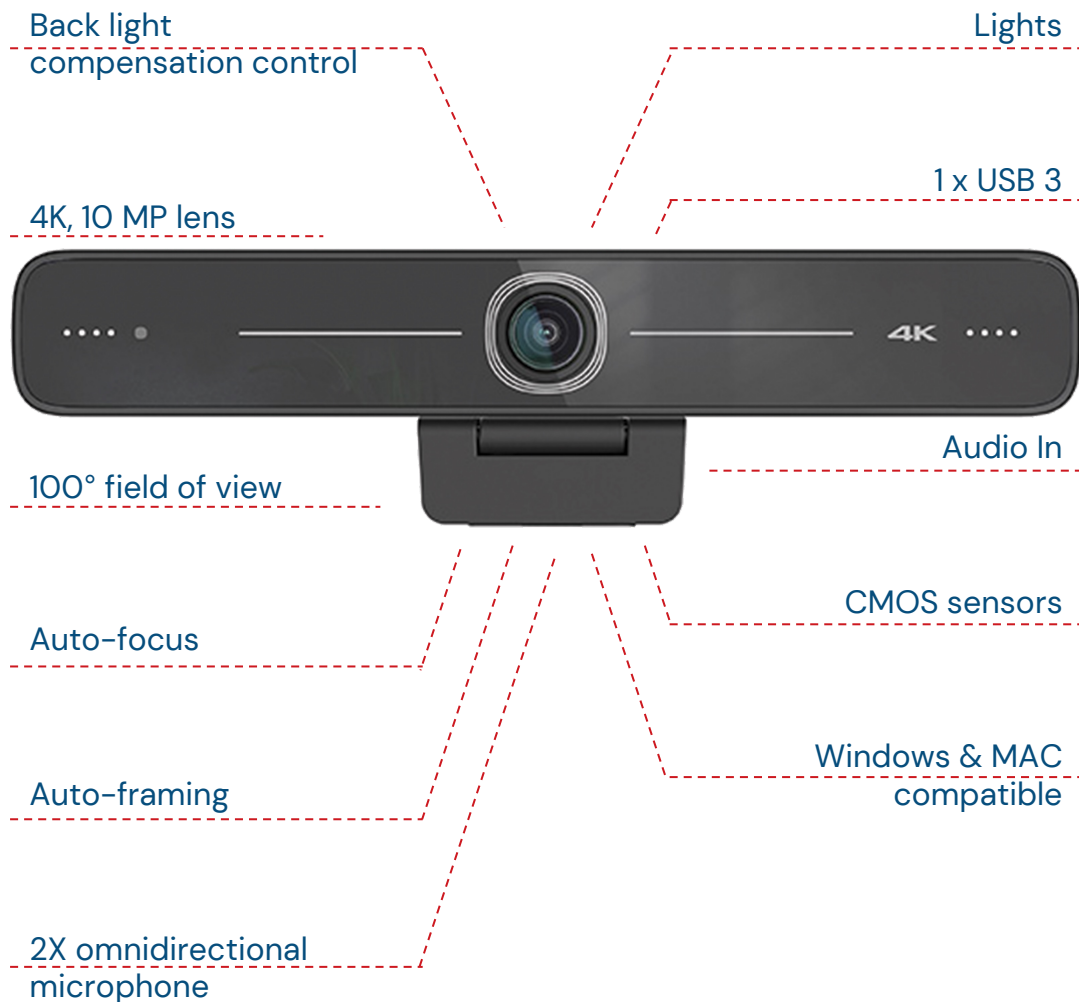

TECHNICAL DATASHEET

FEATURE	SPECIFICATIONS	
Camera Parameters		
Effective Mega Pixels	10MP 16:9	
Output interfaces	1 Channel USB 3.0 output, Type B, Support audio-in	
Audio input	2*Built-in MIC pickup	
Sensor	1/2.8 inch High Quality 4K CMOS Sensor	
Video Format	<p>H264 : 3840*2160@30 /2560*1440@30 /1920*1080@30 /1600*896@30 /1280*720@30 /1024*576@30 /960*540@30 /800*600@30 /800*448@30 /720*576@30 /720*480@30 /640*480@30 /640*360@30 /480*270@30 /352*288@30 /320*240@30</p> <p>NV12 : 1920*1080@15 /1280*720@30 /1024*576@30 /800*600@30 /800*448@30 /640*480@30 /640*360@30 /480*270@30 /320*180@30</p> <p>MJPG : 3840*2160@30 /2560*1440@30 /1920*1080@30 /1600*896@30 /1280*720@30 /1024*576@30 /960*540@30 /800*600@30 /800*448@30 /720*576@30 /720*480@30 /640*480@30 /640*360@30 /480*270@30 /352*288@30 /320*240@30</p> <p>YUY2 : 1920*1080@30 /1280*720@30 /1024*576@30 /800*600@30 /800*448@30 /640*480@30 /640*360@30 /480*270@30 /320*180@30</p>	
Video Angle	91° (D) /83°(H)/54°(V)	110° (D) /100°(H)/53°(V)
Focus	f=3.24mm	f=2.26mm
Aperture	F2.1	F1.8
Digital Zoom	3X	
Minimum Illumination	0.1Lux(F1.8, AGC ON)	
Focus	Manual	
White Balance	Auto / Manual	
Exposure	Auto / Manual	
Backlight Contrast	On/off	
SNR	≥60dB	

TECHNICAL DATASHEET

FEATURE		SPECIFICATIONS
USB Feature		
Operation Systems		Windows 7(1080P or lower) to, Win 10 ; macOS™ 10.10 or higher; Linux (UVC support); Android
Video Compression format		YUY2,NV12,MJPG,H.264
USB Support		Support
Communication Protocol		UVC,UAC
PTZ Control		Support EPTZ
Hardware Requirement		2.4 GHz Intel@ Core 2 Duo processor or higher,2GB memory or higher, USB 2.0 port(USB 3.0 for 4K)
Other Parameters		
Input Voltage/Current	Voltage	5V
	Current	1A(max)
Power Consumption	5W(max)	
Stored Temperature	-10°C~+60°C	
Stored Humidity	20%~90%	
Working Temperature	-10°C~+50°C	
Working Humidity	20%~80%	
Dimension(W*H*D)	180mm×42.5mm×46.3mm	
Weight	Around 0.3kg	
Application	Indoor	
Accessory	USB 3.0 cable, Remote Controller, User Manual	